



Airug™ Mat Custom 2' Roll

FLM197 Not for Chemical Contact, Not for Oil/Grease Contact, 2' x .375"

Economical, ribbed floor mat with 3/8" thick closed-cell PVC sponge construction provides basic anti-fatigue comfort in dry areas.

- 3/8" thick closed-cell PVC sponge relieves leg and back discomfort
- Ribbed top surface and beveled edges reduce tripping hazards and resist moisture
- Available in black or gray
- Good anti-fatigue mat for dry areas, inexpensive enough to equip multiple workstations
- Custom length lets your mat match your workplace with clean, factory-cut edges

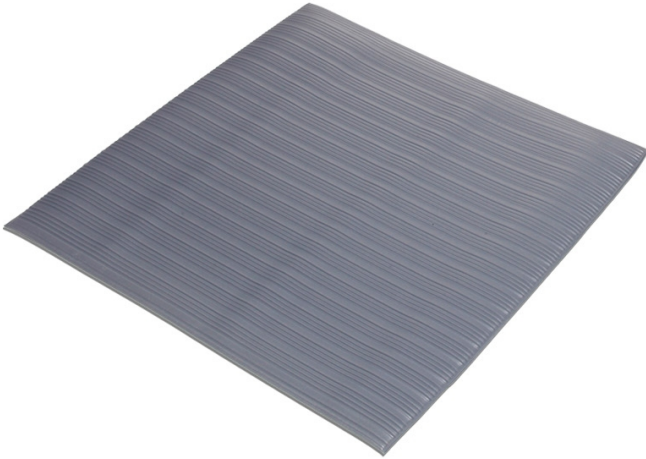

| Item# | Description | Dimensions | Weight |
|--------------|-------------|----------------|----------|
| FLM197-BK-SM | Black | 2' W x .375" H | 1.5 lbs. |
| FLM197-GY-SM | Gray | 2' W x .375" H | 1.5 lbs. |

Metric Equivalent:

| Item# | Description | Dimensions | Weight |
|--------------|-------------|------------------|--------|
| FLM197-BK-SM | Black | 61cm W x 9.5mm H | .7 kg |
| FLM197-GY-SM | Gray | 61cm W x 9.5mm H | .7 kg |

Specifications

| | |
|-----------------------------|----------------------------|
| Static-Dissipative | No |
| Drainage Holes | Without Holes |
| Anti-Slip | Yes |
| Dimensions | 2' W x .375" H |
| Chemical Contact | Not for Chemical Contact |
| Oil/Grease Contact | Not for Oil/Grease Contact |
| Maximum Order Length | 60 |

| | |
|-------------------------------|------------------------|
| Minimum Order Length | 2 |
| Beveled Edge | Yes |
| Brand | NoTrax |
| Grit Surface | No |
| Safe for Welding Areas | No |
| Sold as | 1 foot |
| Weight | 1.5 lbs. |
| Composition | Closed-Cell PVC Sponge |
| Application | Dry Applications |
| UNSPSC | 52101510 |
| Pigalog® Page Number | <u>Page 241</u> |

Metric Equivalent

| | |
|-------------------|------------------|
| Dimensions | 61cm W x 9.5mm H |
| Weight | .7 kg |

Technical Information

Technical Documents

[NoTrax® Floor Matting](#)

Disclaimers

Nominal Anti-Fatigue Mat Dimensions

Mat sizes are approximate as rubber shrinks and expands in conjunction with temperature and time. Tolerable manufacturing size variance is 3-5%.



One Pork Avenue • Tipton, PA 16684-0304

1-855-493-4647 • Fax: 1-800-621-7447 • newpig.com • hothogs@newpig.com